

Features

- Up to 700 W output power, 123.6 W/in³
- Extreme case operating temp. range for request up to -60...+130 °C
- Efficiency up to 92 %
- 117x61x12.85 (mm) aluminium case
- Input range:
"27M" - (18-40 VDC) - customized
- Unified height of 12.85 mm, allows using 20-600 W JETDiR units with common heatsink
- Output voltage trimming
- Remote on/off



Description

JETDiR700-R6 are the series of isolated DC/DC converters meant to work under both heavy electrical and environmental conditions. Output power is **up to 700 Watts**, power density is up to **123.6 W/in³**, with standard of **-40° to +110° C**. The units feature a system of over-current protection and over-voltage protection. Standard functions include remote on/off and output voltage trimming. Its versatility allows you to implement the converter in a vast number of industrial applications, supplying capacitive, constant-power and impulse load. Application fields: low-high altitude, land transport, supercomputers, mining, equipment in high and low temperature regions, digital signage equipment, APAR radars and others - where there are needed low-profile and high efficiency.

700 W model

One channel 700 W model	Input voltage range	Power max.	Output voltage nom.	Output current max.	Efficiency typ.
JETDiR700-27MS32W-R6-LU-V2	18-40 VDC (80 VDC 1s transient)	700 W	32 VDC (27-40 VDC)	21.9 A	92 %

Custom parameters compared to base model JETDiR600


Pout	700 W
Uin	18-40 VDC
Limited case temperature	max. 90 °C
Over-temp protection	typ. 95 °C
Output trimming	27-40 VDC, <-16%; +25%> of nominal incorrect unit loading may result in failure and waiving of warranty
Parallel operation, External feedback	Not available

General specifications		
Switching frequency		400 kHz typ. (PWM modulation)
Temperature ranges	operating case temp.	-40 °C to +90 °C
	storage temp.	-60 °C to +130 °C
Over-temperature protection		+95 °C typ.
Thermal mode and cooling method		conductive via heatsink
Humidity (non-condensing)		5-95 % rel. H
Insulation	input/case, input/output	1500 VDC
	output/case	1000 VDC
Isolating resistance @ 500 VDC		>20 MOhm
Thermal shock, mechanical shock & vibration		MIL-STD-810F
Safety standards		IEC/EN 60950-1
Typical MTBF	$P_{out} = 0.7 \cdot P_{out,max}$	113 000 hrs (Tcase = 50 °C)
Weight (max)		282 g
Input specifications		
Input voltage range	range "27M"	18-40 VDC (80 VDC 1s transient)
Start-up input voltage		15-18 VDC
EMC standard compliance	see typical connection scheme, also recommended with JETDF20	
Output specifications		
Output voltage adjustment	in range <-15%; +25 %>, via ADJ output (see drawing)	
Output voltage regulation	input variance $U_{in,min}$ to $U_{in,max}$	±0.5 %
	load var. 10 % to 100 %	±2 %
Ripple and noise (peak-to-peak)	20 MHz bandwidth	<2 %
Protection	over-load	auto-reset at 110-150 % of $I_{out,nom}$
	over-voltage	<130 % U_{out}
Capacitive load (max)	24 VDC output (50% P_{out}) - typ. 6000 uF	
Minimum load	<i>not required</i>	
Remote Off	connect ON to -IN or apply 0-0.5 VDC to ON	

Please contact the tech. team at aeps@aeps-group.cz for more information.

All specifications are valid for normal climatic conditions, nominal output voltage and current, unless otherwise stated.


Typical connection scheme (minimum required)

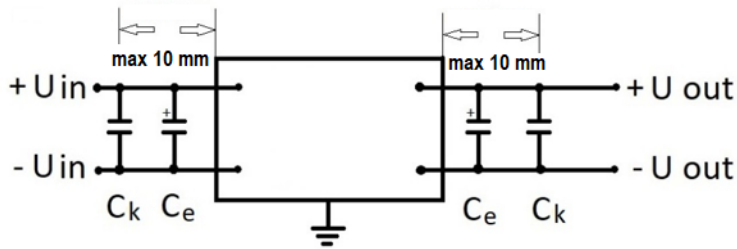

The design of the units allows their use only when mounted on a PCB. It's necessary to use certain type components. In the figure: Ck – ceramic capacitors of a certain operating voltage and of several μF capacity; Ce – electrolytic capacitors of a certain operating voltage and of polymer, aluminum or tantalum type of tens to

hundreds μF capacity. For component values – please see point 5.5 in [Reference Technical Material for DC/DC units](#).

Max output power based on case temperature

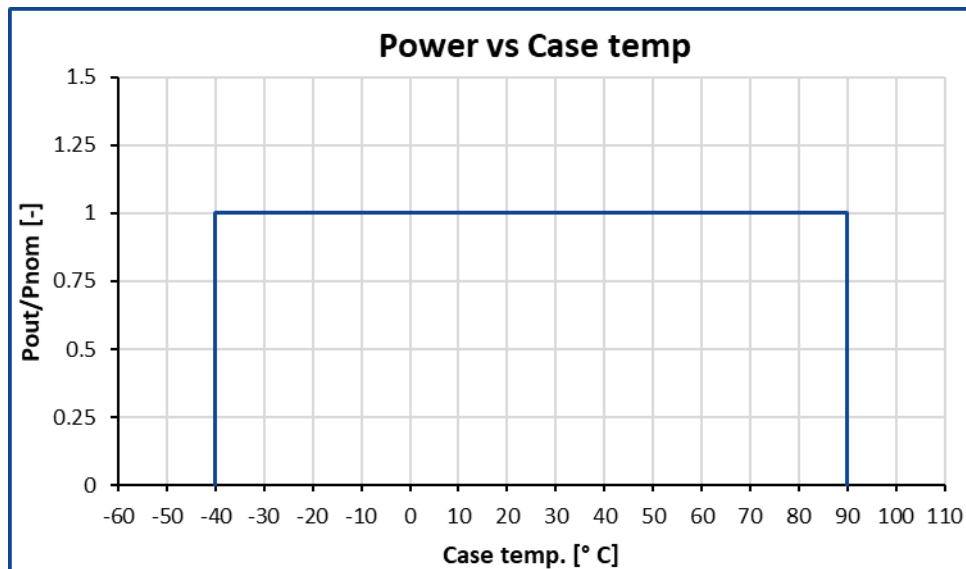

Before operation, the product label on converter top side has to be removed.

If chosen cooling method is conduction, the unit must be operated on a heatsink with thermal conductive paste applied between the unit surface and a heatsink for quality contact (with thickness less than 100 μm , of minimal thermal resistance 2 W/K.m). Mesh stencil should be used to apply paste in a pattern of 2x2 mm to 4x4 mm squares mm with 0.5-1 mm spacing between the squares. This allows paste to be evenly spread in a thin layer and excess air to escape when tightening screws during unit mounting.

If it's necessary to shortly turn on the unit (for example for input-control testing), an aluminium (or copper) coldplate must be used as a heatsink. Its width and length must be not less than of the unit itself, with thickness at least 4 mm. It's prohibited to use the units without the specified coldplate.

Note:


The units have a short-circuit output protection, which is for emergency only, not for long-term operation. It's prohibited to use the units with reversed input voltage polarity or turn on the units with short-circuited outputs (the units have the special detectors inside).

If you have any questions please contact us directly at aeps@aeps-group.cz.

Dimensions

1	2	3, 4	5, 6	7	8, 9	10, 11	12	13	14
CASE	ON	-IN	+IN	n.c.	-OUT	+OUT	n.c.	ADJ	n.c.

Dimensions in millimeters, 4 mounting holes, PCB mounting only

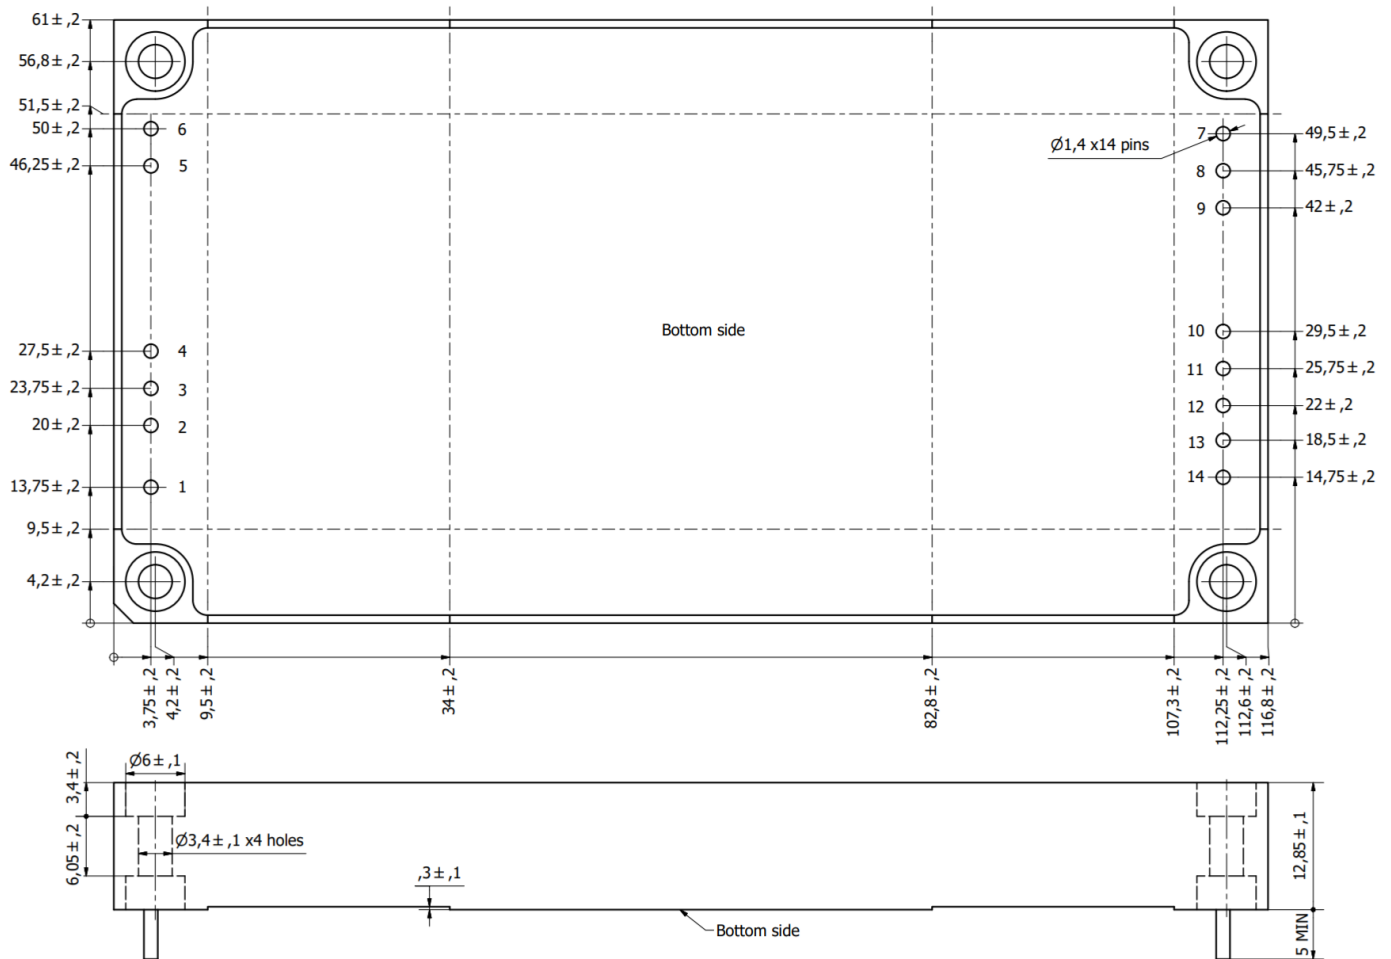

Additional information

Please, note that all information in this material is for reference only. Further detailed information (including: additional requirements, manuals and circuit schemes) is found at www.aeps-group.com or provided via an email request at aeps@aeps-group.cz. All pictures shown are for illustration purpose only, actual product appearance may vary, incl. inner components choice and placement and connectors placement.

According to company's policy in view of constant improvements of the production design the manufacturer reserves the right to change the contents of specifications and promotional materials without prior notice! Make sure you are using the latest documentation downloadable at www.aeps-group.com.

© «AEPS-GROUP». All rights reserved.